

SMA 4WAY 0.7-2.7GHz

Model :RPDS4-0727-01S



Features

- Wideband Performance 700 ~ 2700 MHz
- Low Insertion Loss
- Low VSWR
- High isolation

Electrical Specifications

Frequency	700 ~ 2700 MHz
Impedance	50 Ω
VSWR(Input)	≤ 1.3 : 1
VSWR(Output)	≤ 1.3 : 1
Insertion Loss (dB)	≤ 0.7dB
Isolation (dB)	≤ 20dB
Amplitude Unbalance	± 3°
Phase Unbalance	± 3°
Connectors	SMA- female

Outline Drawing

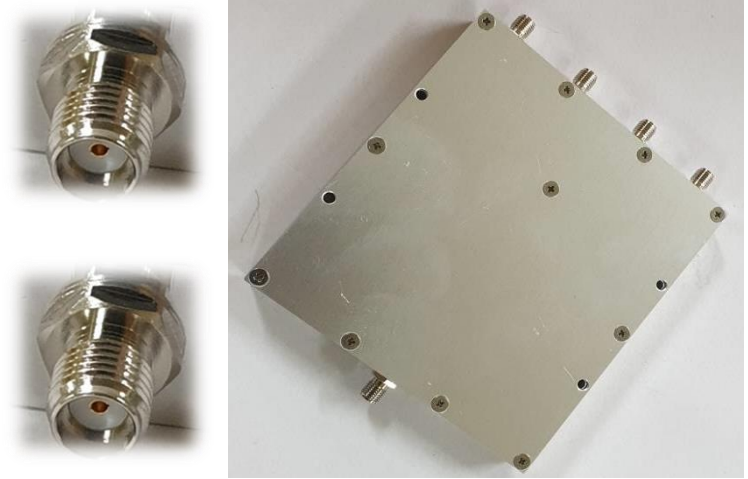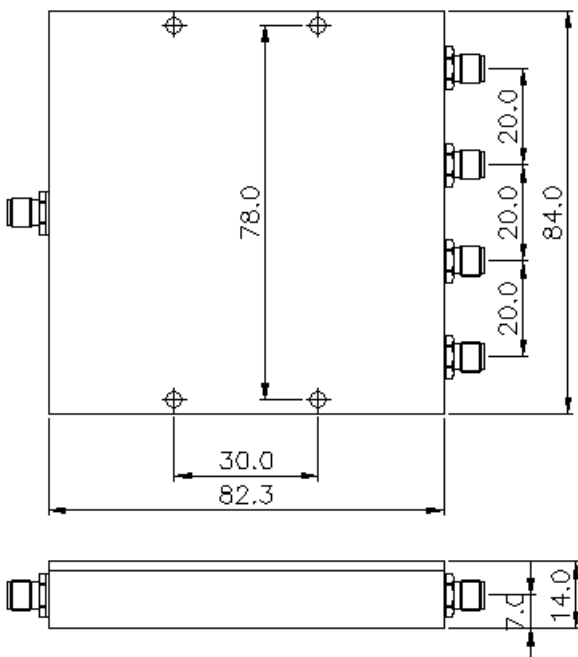

Power Handling

Foreard	35W(Avg)
Reverse	2W(Avg)

Material Specification

Connectors	Brass, Tri-Metal
Housing	Aluminum, White chromate
Temperature Range	- 40℃ to +80℃

Typical Test Result