


REV	DESCRIPTION	DSG	APR	DATE

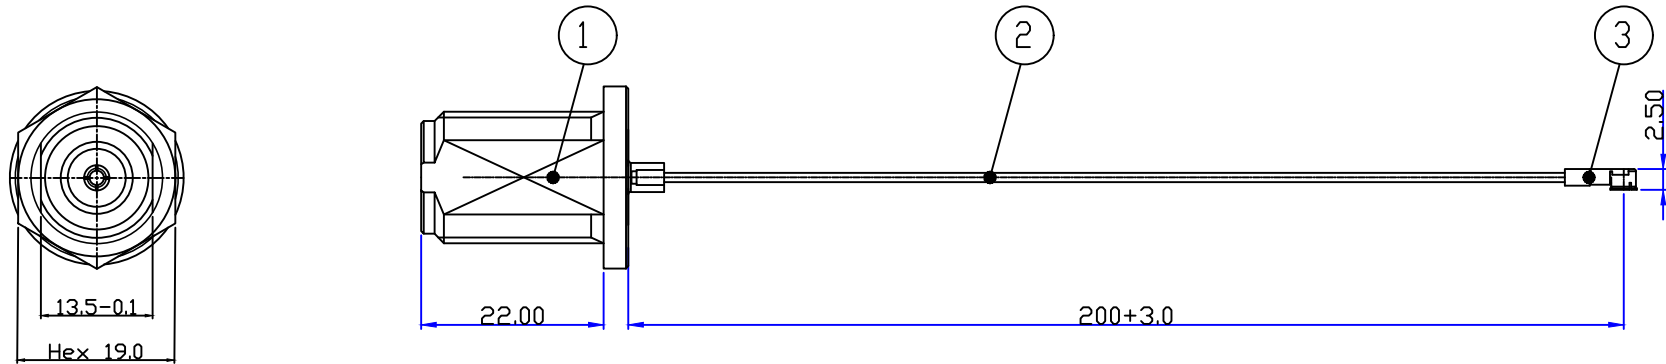

NOTE

1. Material and finish

Connector body : Nickel plated Brass  
 Connector center contact : Gold plated Beryllium Copper  
 Insulator : PTFE  
 Coupling nut : Nickel plated Brass

2. Specification


Impedance : 50 Ohms  
 Frequency range : dc ~ 3.0GHz  
 V.S.W.R : 1.30 Max @ 3 GHz  
 Operating Temperatur : -40°C ~ 85°C

PARTS LIST

No	Model	Qty	Spec	Part No	Remark
1	CONNECTOR	1	N(F) BH 1.13d	XXXX-XXXX	Ni/Au/Ni
2	COAX CABLE	1	1.13d	검정색	
3	CONNECTOR	1	MHF-1	-	-
4	Shrink Tube	1			

UNLESS OTHERWISE SPECIFIED :  
 ALL DIMS IN MILLIMETERS  
 TOLERANCES ON DECIMALS  
 1 PLACE - AGGEE  
 2 PLACE - REMOVE BURRS, BREAK SHARP EDGES  
 $\sqrt{1.6\sigma}$

THIRD ANGLE



DRAW	DESIGN	CHECK	APPRO.
<i>Bq_KPM</i>	<del>/</del>	<del>/</del>	<i>MK_HONG</i>
2018.11.08			2018.11.08

TITLE
N(F) BH-MHF1-200

Material	SEE PART LIST
Finish	SEE PART LIST

SIZE	DWG NO.	REV
A4	-	A
Scale : NS Do Not Scale Drawing		