REV	DESCRIPTION	DSG	APR	DATE

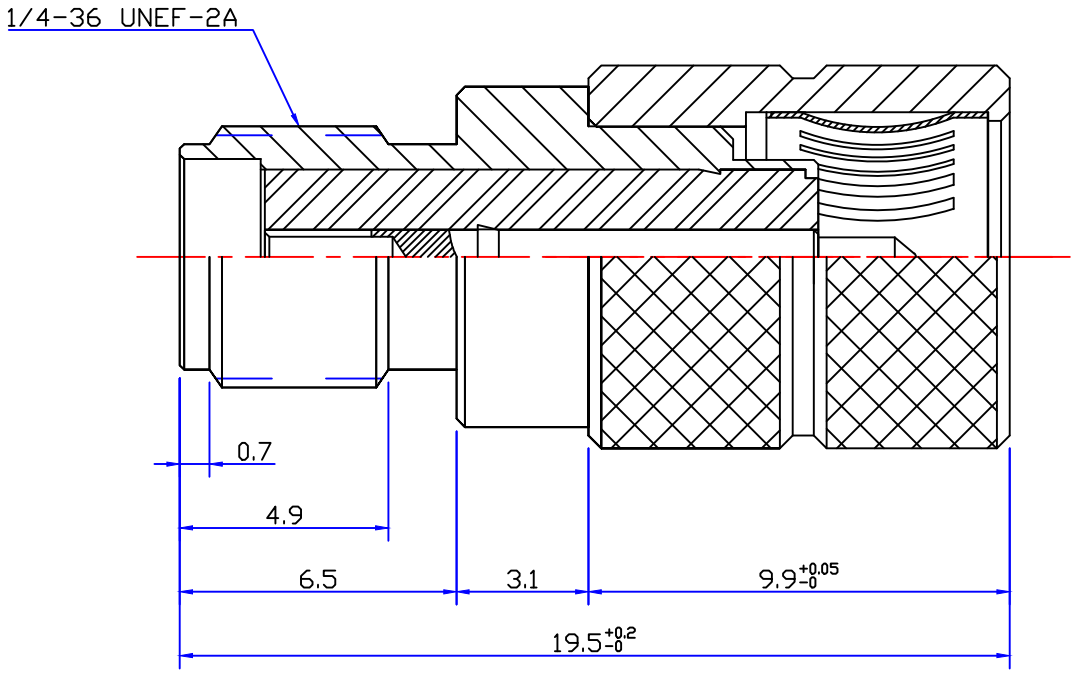

Impedance ..... 50 Ω
Frequency range ..... Dc ~ 6 Ghz
V.S.W.R ..... 3.0 GHz : ≤1.10
6.0 GHz : ≤1.20
Insertion loss .... 3.0 GHz : ≤0.2
6.0 GHz : ≤0.3

Connector parts	Material	Plating
Bodys	Brass	Gold
Center contact	Beryllium-copper	Gold
Spring	Beryllium-copper	Gold
Insulator	PTFE	White

UNLESS OTHERWISE SPECIFIED					
DIMENSION	0	0.0	0.00	0.000	ANGLE
TOLERANCE	±0.5	±0.1	±0.03	±0.01	±0.5

RFCM

SCALE	MM	UNIT	1:1
PROJ		REV	1.0

DESIGN	CHECK	APPRO.
Park Cheol-Hong		Hong Seoyun
		2018. 10.25

TITLE SMA PJ PUSH TEST ADAPTOR

DWG NO.

Material KS-D-5101 C3604BD

Finish SEE NOTE 1

1 of 1 A4